



Technical data

Voltage	U	230	V
Phase		1	~
Frequency		50	Hz
Speed		1400	RPM
Power consumption	P _e	100	W
Nominal current	I	0.5	A
Maximum current	I	0.6	A
Capacitor		03/400	μF
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class Fan		IP55	
Sound pressure level at 2 m	L _p	55	dB(A)
Weight		8.2	kg
Packing dimensions		460x460x315	mm

Fan details


Impeller blades	6
Impeller type	3
Impeller system	C
Impeller material	PP

Control options

Triac controller	Yes
Transformer	Yes
Frequency drive	No
Intelligent Fan Drive	Yes

* All control options including single phase control frequency are available. Please contact Vostermans Ventilation Sales for more information

Characteristics

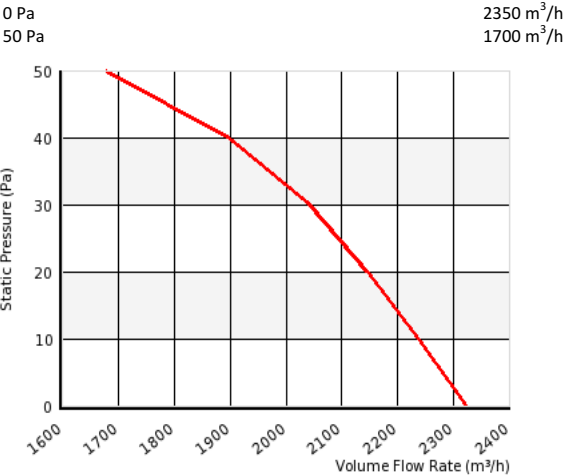

Please note: Picture may deviate from original product


Approval(s)




No.

Wiring diagram - Fan

AA01 - 1 Phase - Standard - CCW

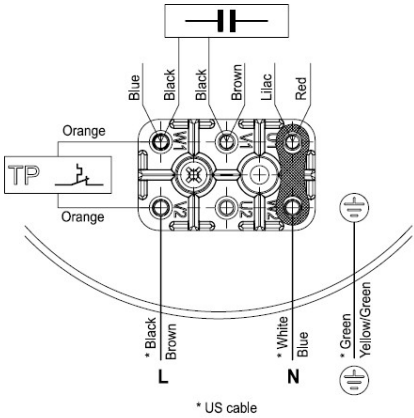

Dimensions

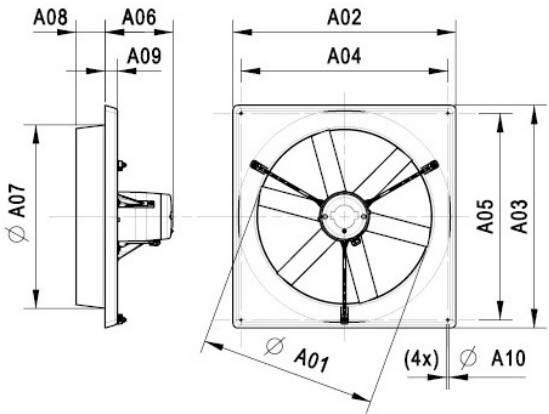

A01:	312 mm
A02:	443 mm
A03:	443 mm
A04:	395 mm
A05:	395 mm
A06:	192 mm
A07:	340 mm
A08:	84 mm
A09:	36 mm
A10:	8 mm



VOSTERMANS
VENTILATION

Vostermans Ventilation B.V.
Venlo - The Netherlands
+31 (0)77 389 32 32
ventilation@vostermans.com
www.vostermans.com

Vostermans Ventilation Inc.
Bloomington, IL - U.S.A.
+1 309 827 9798
ventilation@vostermansusa.com
www.vostermansusa.com

Vostermans Ventilation Ltd. Co.
Shanghai - China
+86 21 5290 2889/2899
ventilation@vostermanschina.com
www.vostermans.com

Vostermans Ventilation Sdn. Bhd.
Tmn Klang Jaya - Malaysia
+60 (0)33324 3638
ventilation@vostermansasia.com
www.vostermansasia.com