



Technical data

Voltage	U	230	V
Phase		1	~
Frequency		50	Hz
Speed		1350	RPM
Power consumption	P _e	230	W
Nominal current	I	1.1	A
Maximum current	I	1.2	A
Capacitor		06/400	μF
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class Fan		IP55	
Sound pressure level at 2 m	L _p	61	dB(A)
Weight		9.3	kg
Packing dimensions		560x560x315	mm

Fan details

Impeller blades	6
Impeller type	3
Impeller system	C
Impeller material	PP


Control options

Triac controller	Yes
Transformer	Yes
Frequency drive	No
Intelligent Fan Drive	Yes

* All control options including single phase control frequency are available. Please contact Vostermans Ventilation Sales for more information

Characteristics

0 Pa	4850 m ³ /h
50 Pa	4000 m ³ /h

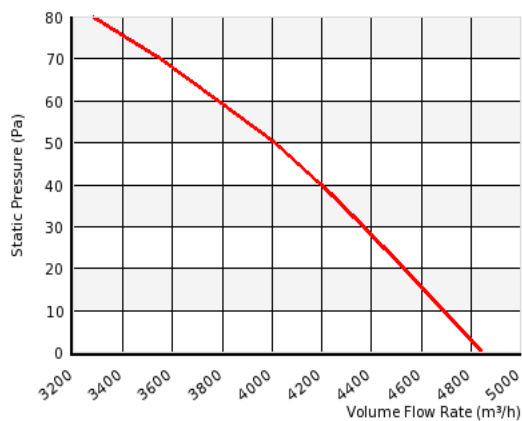


Please note: Picture may deviate from original product

Approval(s)




Wiring diagram - Fan

AA01 - CCW

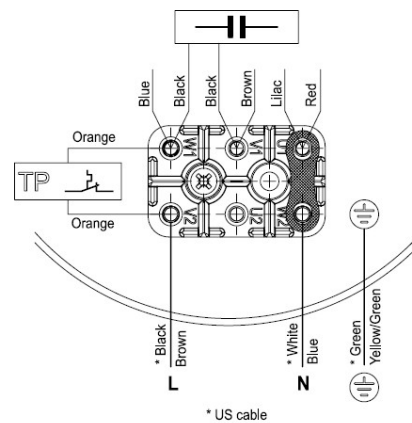

Dimensions

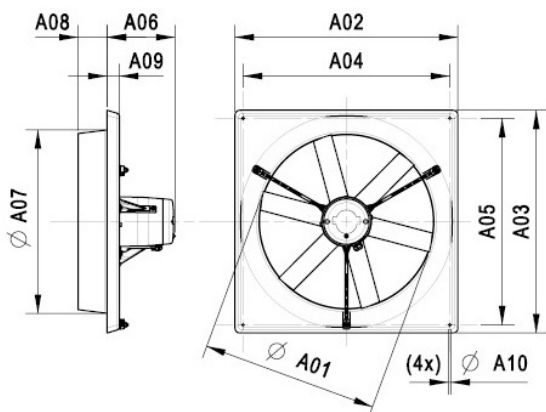

A01:	415 mm
A02:	543 mm
A03:	543 mm
A04:	495 mm
A05:	495 mm
A06:	192 mm
A07:	440 mm
A08:	84 mm
A09:	36 mm
A10:	8 mm